




*Porovnání tloušťky izolace pro chlazení a klimatizaci
pozinkovaného a Climatherm potrubí*

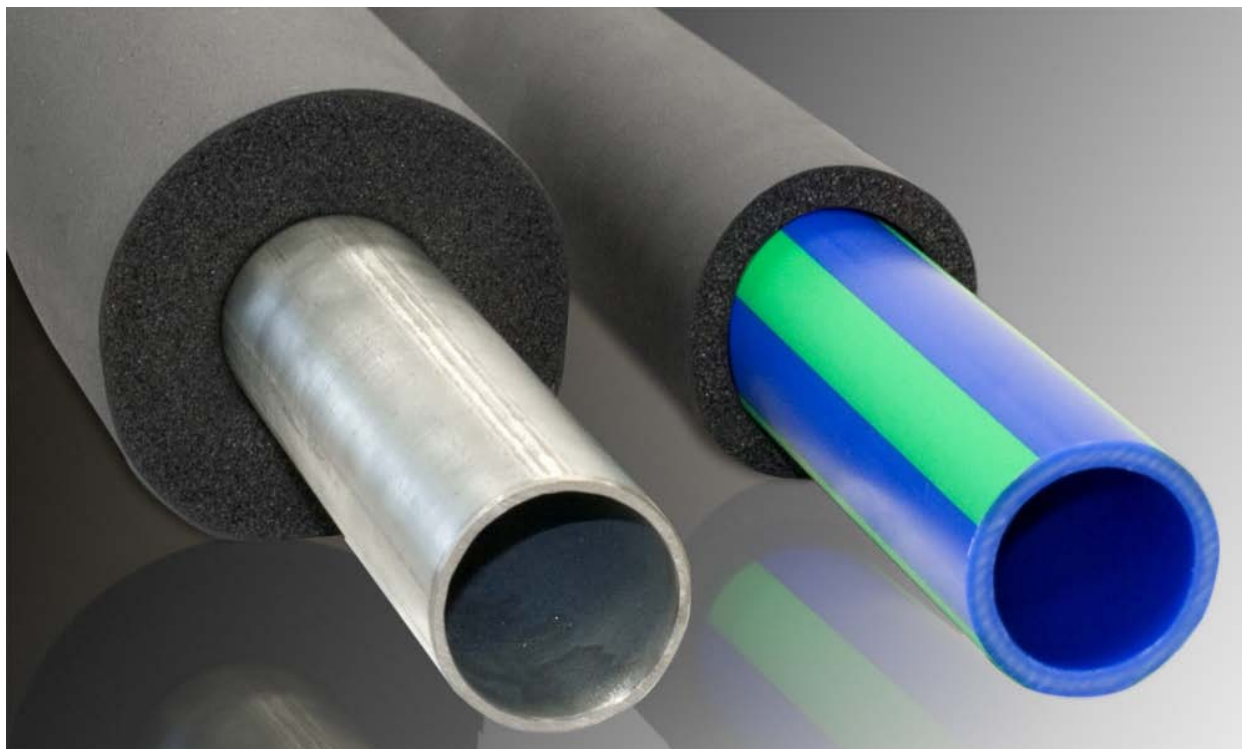

Vzdálenosti závěsů pro potrubí Climatherm

ΔT [K]	Průměr potrubí d (mm)												
	20	25	32	40	50	63	75	90	110	125	160	200	250
	Vzdálenost závěsů v cm												
0	120	140	160	180	205	230	245	260	290	320	340	345	350
20	90	105	120	135	155	175	185	195	215	240	270	275	280
30	90	105	120	135	155	175	185	195	210	225	245	250	255
40	85	95	110	125	145	165	175	185	200	215	235	240	245
50	85	95	110	125	145	165	175	185	190	195	205	210	215
60	80	90	105	120	135	155	165	175	180	185	195	200	205
70	70	80	95	110	130	145	155	165	170	175	185	190	195

Climatherm - potrubí se sklovláknem

*Pražská 298, P.O.Box 28, 250 36 Brandýs/Labem, Stará Boleslav
tel., fax: 326907288, mobil: 777313823
e-mail: aeroflex@iol.cz, web: www.aeroflex.cz*